

- Solid mechanical construction
- Protection to IP 65, IP 66
- SMD technology
- Electronic preset
- Connection to fieldbus over suitable gateway



## Absolut Encoder EAS 65 / 58

Optical absolute singleturn shaft encoder of high resolution, Flange diameter 65 mm

### Resolution

#### Resolution (Steps/360°):

65536 = 16 Bit

8192 = 13 Bit

4096 = 12 Bit

### Type explanation

#### EAS 65/58-8192G-30-D-SC12

Encoder type	Absolute
Flange diameter	ø 65 mm
Case diameter	ø 58 mm
Number of bits	4096 = 12 bit 8192 = 13 bit 65536 = 16 bit
Electronic adjustment	Yes
Supply voltage	30 = 10..30 VDC
Output driver	D-SSI
Position of connection	R S
Connector	C12 = 12 pins M23
Shaft diameter	ø 10 mm

## Technical data

### Mechanical data

Rotational speed	? 12.000 min <sup>-1</sup>
Torque	? 3 Ncm
Moment of inertia	30 g cm <sup>2</sup>
Loading of bearings	110 N radial 40 N axial
Operational life of ball bearings	> 10 <sup>5</sup> h (1000 min <sup>-1</sup> )
Weight	? 0,35 kg

### Environmental conditions

Vibration	100 m/s <sup>2</sup> (10 ... 1000 Hz)
Shock	300 m/s <sup>2</sup> (11 ms)
Operating temperature	-40 ... +85°C
Storage temperature	-40 ... +85°C
Atmospheric humidity	? 98% r.h.
Protection class	IP 65 (DIN 40050/IEC 144) IP 66 (optional)

### Electrical data

Scanning type	Optical, without contact
Transmitter, infrared	LED
Receiver	Photo-Array
Scanning frequency LSB	800 kHz
Measurement accuracy	± ½ LSB (12 bit) ± 1 LSB (13 bit) ± 2 LSB (16 bit)
Supply voltage	V <sub>cc</sub> = 10...30 VDC
Power consumption	? 90 mA (V <sub>cc</sub> = 24 V)

### Electrical connections

#### SSI

Interface	RS485
Clock	Optocoupler

#### Incremental outputs

1024 pulses per revolution	AA+BB/90° RS422 (optional)
----------------------------	----------------------------

#### Inputs

Rotational direction	CW/CCW
Electronic adjustment	RESET (optional)

### Connector 12 pins M23

Connection	Signal
Pin 1	+Vcc
Pin 2	0 V GND
Pin 3	Clock+
Pin 4	Data+
Pin 5	RESET <sup>1)</sup>
Pin 6	Data-
Pin 7	Clock-
Pin 8	A+ <sup>2)</sup>
Pin 9	CW/CCW
Pin 10	B+ <sup>2)</sup>
Pin 11	B- <sup>2)</sup>
Pin 12	A- <sup>2)</sup>

1) optional


2) nur bei Ausgangstreiber "DI"

### Cable

Wire colour	Signal
White	0 V GND
Brown	+Vcc
Green	Clock+
Yellow	Clock+
Grey	Data+
Pink	Data-
Red	CW/CCW
Black	RESET <sup>1)</sup>

1) optional

### Outline drawing

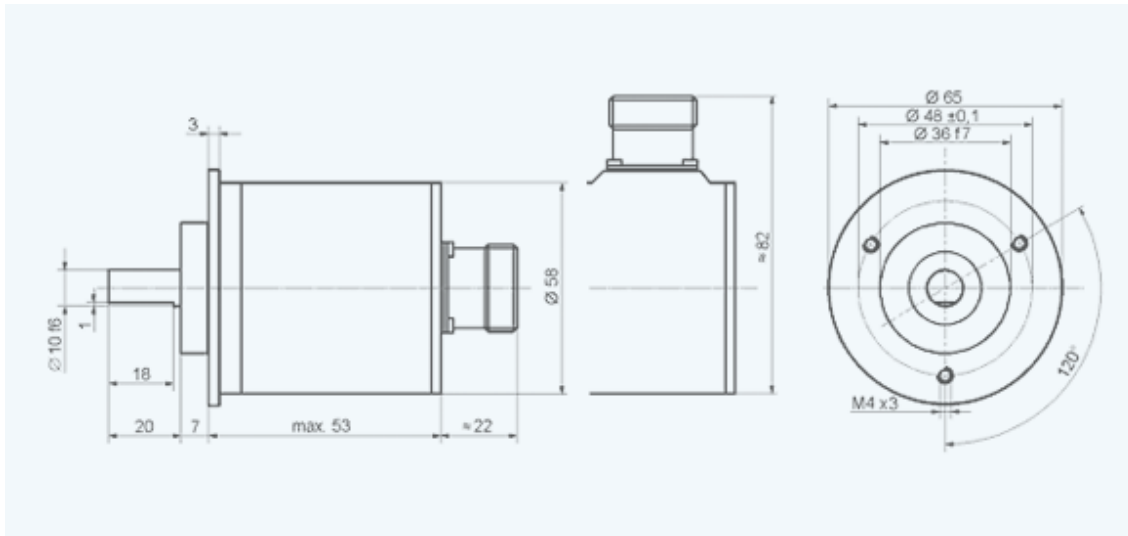

Version AE 566-311 · Subject to change

[Go back](#)

INDUcoder® · INDUcoder Messtechnik GmbH, Kaiserstraße 316, 47178 Duisburg, Deutschland  
Tel: (0203) 57047-0, Fax: (0203) 57047-20, E-Mail: [info@inducoder.de](mailto:info@inducoder.de), Internet: [www.inducoder.de](http://www.inducoder.de)