

Solid mechanical construction  
 Protection to IP 65  
 SMD technology  
 Parallel outputs



## Absolut Encoder EA 59Z Parallel

Optical absolute shaft encoder of high resolution

### Resolution

#### Resolution (Steps/360°):

1024 = 10 bit                      4096 = 12 bit                      8192 = 13 bit

### Type explanation

#### EA 59Z-8192G-30-P-SC16

Encoder type	Absolute
Flange diameter	∅ 58 mm
Case diameter	∅ 58 mm
Special flange	Yes
Number of bits	8192 = 13 Bits 4096 = 12 Bits 1024 = 10 Bits
Single-turn	Yes
Supply voltage	30 = 10..30 VDC
Output driver	P
Position of connection	R S
Connector	C16 = 16 pins M23
Shaft diameter	∅ 10 mm

## Technical data

### Mechanical data

Rotational speed	? 6000 min <sup>-1</sup>
Torque	? 5 Ncm
Moment of inertia	50 g cm <sup>2</sup>
Loading of bearings	110 N radial 20 N axial
Operational life of ball bearings	> 10 <sup>5</sup> h (1000 min <sup>-1</sup> )
Weight	? 0,3 kg

### Environmental conditions

Vibration	100 m/s <sup>2</sup> (10 ... 1000 Hz)
Shock	200 m/s <sup>2</sup> (11 ms)
Operating temperature	-30 ... +70°C
Storage temperature	-40 ... +85°C
Atmospheric humidity	? 98% r.h.
Protection class	IP 65 (DIN 40050/IEC 144)

### Electrical data

Scanning type	Optical, without contact
Transmitter, infrared	LED
Receiver	Photo-Array
Supply voltage	V <sub>cc</sub> = 10 .. 30 VDC
Power consumption	? 180 mA (V <sub>cc</sub> = 24 V)
Output frequency	? 100 kHz
Load capacity of the outputs	20 mA

### Connector 12 pins M23

Connection	Signal
Pin 1	G 0
Pin 2	G 1
Pin 3	G 2
Pin 4	G 3
Pin 5	G 4
Pin 6	G 5
Pin 7	G 6
Pin 8	G 7
Pin 9	G 8
Pin 10	G 9
Pin 11	G 10 <sup>1)</sup>
Pin 12	G 11 <sup>1)</sup>
Pin 13	G 12 <sup>2)</sup>
Pin 14	CW/CCW
Pin 15	0 V GND
Pin 16	+Vcc


1) N.C. bei EA59Z-1024

2) N.C. bei EA59Z-1024 und EA59Z-4096


### Cable

Wire colour	Signal
White	G 0
Brown	G 1
Green	G 2
Yellow	G 3
Grey	G 4
Pink	G 5
Blue	G 6
Red	G 7
Black	G 8
Violet	G 9
Grey/Pink	G 10
Red/Blue	G 11
White/Green	0 V GND
Brown/Green	+Vcc
White/Yellow	G 12
Yellow/Brown	CW/CCW

### Output driver

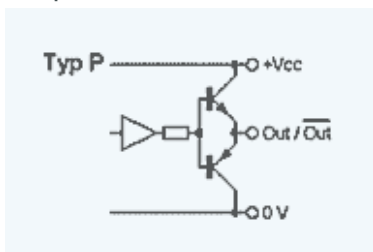

## Outline drawing

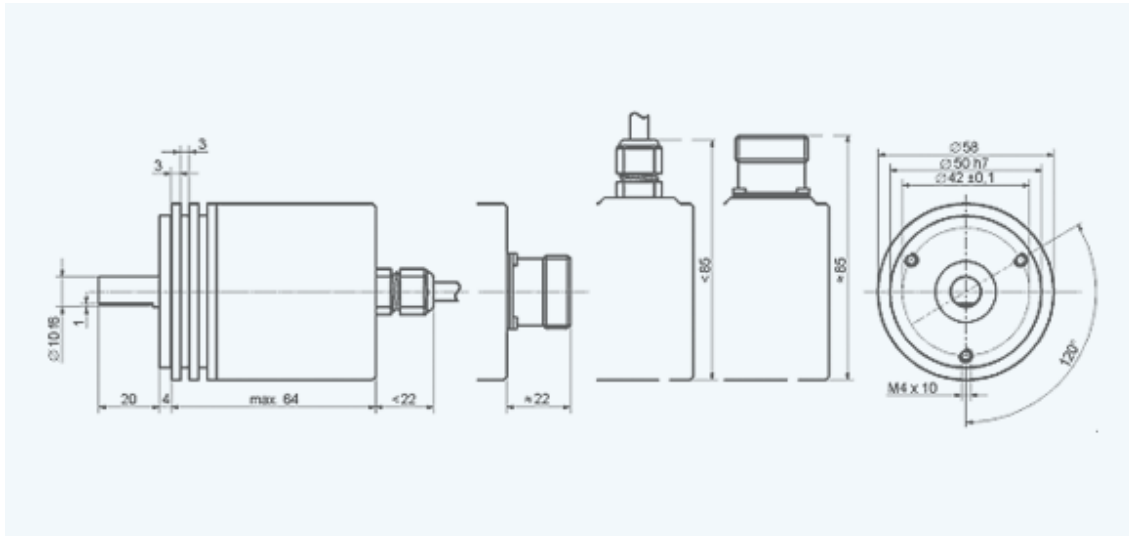

Version AE 559-001 · Subject to change

[Go back](#)

INDUcoder® · INDUcoder Messtechnik GmbH, Kaiserstraße 316, 47178 Duisburg, Deutschland  
Tel: (0203) 57047-0, Fax: (0203) 57047-20, E-Mail: [info@inducoder.de](mailto:info@inducoder.de), Internet: [www.inducoder.de](http://www.inducoder.de)